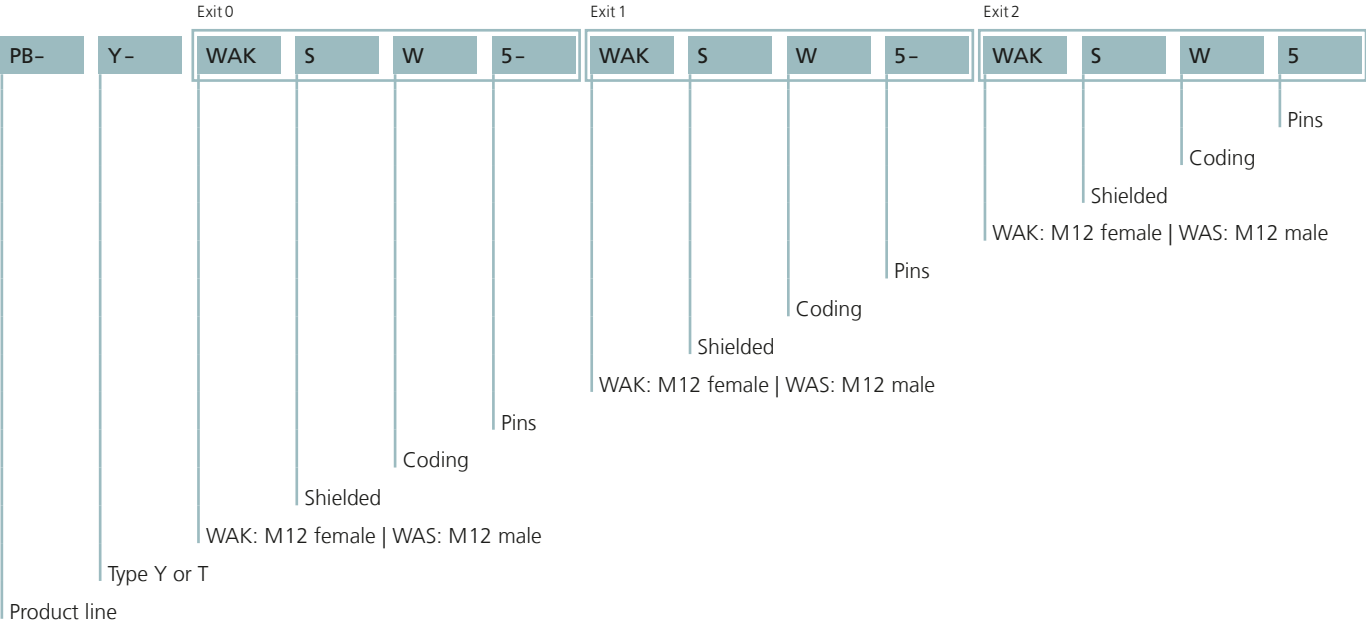
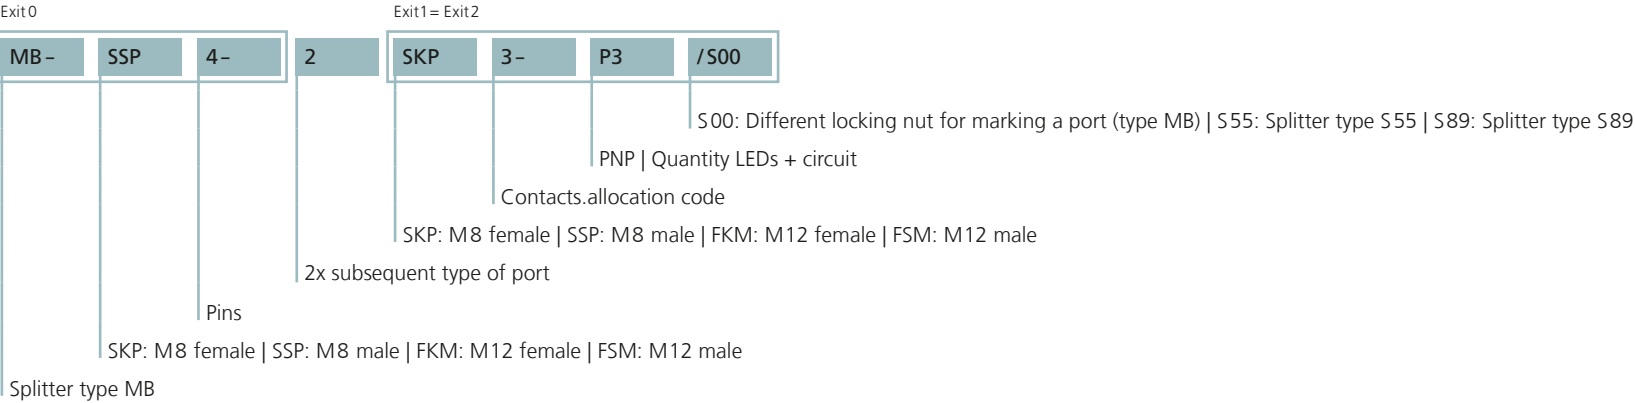


Nomenclature of 2-way splitters





T shielded



Y



S89



MB_M12



Y_M12 shielded



MB_M8





















S56








T-splitters | Y-splitters






Technical data	Y-splitters	T-splitters	Adapters	Panel feed throughs
Insulation resistance	$\geq 10^8 \Omega$	$\geq 10^8 \Omega$	$\geq 10^8 \Omega$	$\geq 10^8 \Omega$
Ambient temperature product	-30°C...+90°C	-30°C...+90°C	-30°C...+90°C	-25°C...+85°C
Contact material	Metal, gold-plated	Metal, gold-plated	Metal	Metal, gold-plated
Contact-carrier material	Plastic, TPU	Plastic, TPU	Plastic, PA	Plastic
Grip body material	Plastic, TPU	Plastic, TPU	Plastic, TPU	
Sealing (female) material	Plastic, TPU	FPM/FKM	Plastic, TPU	
Standards	IEC 61076-2-101/-104	IEC 61076-2-101		IEC 61076-2-101
Degree of protection (mounted)	IP65, IP67, IP68	IP65, IP67, IP68	IP65, IP67, IP68	IP67
Mechanical life-cycle	>100 mating cycles	>100 mating cycles	>100 mating cycles	>100 mating cycles
Degree of pollution	3	3	3	3 (RJ45:2)



With our Y- and T-splitters you can easily place branches. Signals can be distributed directly with a 2-way junction. The ports (male or female) can be arranged in a variety of configurations, what offers you a high variability and diversity. By request, shielded splitter solutions for communication applications in the field of PROFIBUS and CANopen are available.








			Port						
			E0	E1	E2	U[max]	I[max]	Item description	Item-No.
		Y-splitter M12 S89	male, M12, LED 4 Pins, A	female, M12, LED 3 Pins, A	female, M12, LED 3 Pins, A	30V	4A	FSM4-2FKM3P3/S89	8012652
		Y-splitter M12 S89	female, M12 4 Pins, A	male, M12 3 Pins, A	male, M12 3 Pins, A	250V	4A	FKM4-2FSM3/S89	8012651
		Y-splitter M12 S89	male, M12 4 Pins, A	female, M12 3 Pins, A	female, M12 3 Pins, A	250V	4A	FSM4-2FKM3/S89	8010464
			male, M12 5 Pins, A	female, M12 5 Pins, A	female, M12 5 Pins, A	60V	4A	FSM5-2FKM5.4/S89	8010471
		Y-splitter M12 M8 - M8 S89	male, M12 4 Pins, A	female, M8 3 Pins	female, M8 3 Pins	60V	4A	FSM4-2SKP3/S89	8013058
		Y-splitter M12 MB	female, M12 5 Pins, A	male, M12 5 Pins, A	female, M12 5 Pins, A	60V	4A	MB-FKM5-FSM5-FKM5	8024976
		Y-splitter M12 MB	male, M12, LED 5 Pins, A	female, M12, LED 5 Pins, A	female, M12, LED 5 Pins, A	30V	4A	MB-FSM5-2FKM5.4P3	8024644
		Y-splitter M12 MB	male, M12 5 Pins, A	female, M12 5 Pins, A	female, M12 5 Pins, A	60V	4A	MB-FSM5-2FKM5.4	8024643
			male, M12 8 Pins, A	female, M12 8 Pins, A	female, M12 8 Pins, A	60V	2A	MB-FSM8-2FKM8	8028876
			male, M12 5 Pins, A	female, M12 5 Pins, A	female, M12 5 Pins, A	60V	4A	MB-FSM5.4-2FKM5.4/S1927	8027501

			Port						
			E0	E1	E2	U[max]	I[max]	Item description	Item-No.
		Y-splitter M12 MB	male, M12 5 Pins, A	male, M12 5 Pins, A	female, M12 5 Pins, A	60V	4A	MB-FSM5-FSM5-FKM5	8044611
		Y-splitter M12 shielded	female, M12 5 Pins, A	male, M12 5 Pins, A	female, M12 5 Pins, A	60V	4A	Y-WAKS5-WASS5-WAKS5	8057723
		Y-splitter M12 shielded	male, M12 5 Pins, A	female, M12 5 Pins, A	female, M12 5 Pins, A	60V	4A	Y-WASS5-2WAKS5	8056694
			male, M12 8 Pins, A	female, M12 8 Pins, A	female, M12 8 Pins, A	30V	2A	Y-WASS8-2WAKS8	8057725
		Y-splitter M12 shielded	male, M12 5 Pins, A	female, M12 5 Pins, A	female, M12 5 Pins, A	60V	4A	Y-WASS5-2WAKS5.4	8062356
		Y-splitter PROFIBUS M12 shielded	male, M12 5 Pins, B	male, M12 5 Pins, B	female, M12 5 Pins, B	60V	0.4A	PB-Y-WASSW5-WASSW5-WAKSW5	8057724
		Y-splitter M12 shielded	female, M12 5 Pins, A	male, M12 5 Pins, A	male, M12 5 Pins, A	30V	4A	Y-WAKS5-2WASS5	8057722
		Y-splitter M12 shielded	male, M12 5 Pins, A	male, M12 5 Pins, A	female, M12 5 Pins, A	60V	4A	Y-WASS5-WASS5-WAKS5	8057721
		Y-splitter M12 Ø8mm snap - Ø8mm snap	female, M12 4 Pins, A	male, Ø8mm snap 3 Pins	male, Ø8mm snap 3 Pins	60V	4A	FKM4-2ESP3S	8008080

			Port			U[max]	I[max]	Item description	Item-No.
			E0	E1	E2				
		Y-splitter M8 MB	male, M8 4 Pins	female, M8 3 Pins	female, M8 3 Pins	60V	4A	MB-SSP4-2SKP3/S56	8052222
			male, M8 3 Pins	female, M8 3 Pins	female, M8 3 Pins	60V	4A	MB-SSP3-2SKP3-2xAND	8083105
			male, M8 3 Pins	female, M8 3 Pins	female, M8 3 Pins	60V	4A	MB-SSP3-2SKP3	8096527
		Y-splitter M8 MB	male, M8, LED 4 Pins	female, M8, LED 3 Pins	female, M8, LED 3 Pins	30V	4A	MB-SSP4-2SKP3P3/S56	8052223
		Y-splitter M12 S55	male, M12 5 Pins, A	female, M12 5 Pins, A	female, M12 5 Pins, A	60V	4A	FSM5-2FKM5.4/S55	8018720
		Y-splitter M12 M8 - M8 S55	male, M12 4 Pins, A	female, M8 3 Pins	female, M8 3 Pins	60V	4A	FSM4-2SKP3/S55/S56	8052224
		Y-splitter M12 M8 - M8	male, M12 4 Pins, A	female, M8 3 Pins	female, M8 3 Pins	60V	4A	FSM4-2SKP3	8008081
		Y-splitter M8/Ø8mm snap M8 - M8	male, M8/Ø8mm snap 4 Pins	female, M8 3 Pins	female, M8 3 Pins	60V	4A	SESP4S-2SKP3	8008082
		T-splitter M12	female, M12 4 Pins, A	female, M12 4 Pins, A	male, M12 4 Pins, A	250V	4A	FKM4-FKM4-FSM4	8009675
			female, M12 5 Pins, A	female, M12 5 Pins, A	male, M12 5 Pins, A	60V	4A	FKM5-FKM5-FSM5	8011661
			female, M12 8 Pins, A	female, M12 8 Pins, A	male, M12 8 Pins, A	30V	2A	FKM8-FKM8-FSM8	8038856

			Port						
			E0	E1	E2	U[max]	I[max]	Item description	Item-No.
		T-splitter M12	female, M12 4 Pins, A	male, M12 4 Pins, A	male, M12 4 Pins, A	250V	4A	FKM4-FSM4-FSM4	8008139
			female, M12 5 Pins, A	male, M12 5 Pins, A	male, M12 5 Pins, A	60V	4A	FKM5-FSM5-FSM5	8017792
		T-splitter CANopen/DeviceNet M12	female, M12 5 Pins, A	female, M12 5 Pins, A	male, M12 5 Pins, A	60V	4A	FKM5-FKM5-FSM5/S222	8035172
		T-splitter M12	female, M12 4 Pins, A	female, M12 4 Pins, A	male, M12 4 Pins, A	250V	4A	T-WAKS4-WAKS4-WASS4	8060493
		shielded	female, M12 5 Pins, A	female, M12 5 Pins, A	male, M12 5 Pins, A	60V	4A	T-WAKS5-WAKS5-WASS5	8056693
			female, M12 8 Pins, A	female, M12 8 Pins, A	male, M12 8 Pins, A	30V	2A	T-WAKS8-WAKS8-WASS8	8057720
		T-splitter M12 shielded	female, M12 5 Pins, A	male, M12 5 Pins, A	male, M12 5 Pins, A	60V	4A	T-WAKS5-WASS5-WASS5	8057718
		T-splitter PROFIBUS M12 shielded	female, M12 5 Pins, B	male, M12 5 Pins, B	male, M12 5 Pins, B	60V	0.4A	PB-T-WAKSW5-WASSW5-WASSW5	8057719
		Adapter M12 - M12	female, M12 5 Pins, A	female, M12 5 Pins, A		60V	4A	WAK4.5-WAK4.5	8041351
		Adapter M12 - M12	female, M12 5 Pins, A	male, M12 5 Pins, A		60V	4A	WAK4.5-WAS4.5	8041349

			Port						
			E0	E1	E2	U[max]	I[max]	Item description	Item-No.
		Adapter M12 - M12	male, M12 5 Pins, A	male, M12 5 Pins, A		60V	4A	WAS4.5-WAS4.5	8041352
		Adapter M12 - M8	male, M12 3 Pins, A	female, M8 3 Pins		60V	4A	FSM3-SKP3	8008079
			male, M12 4 Pins, A	female, M8 4 Pins		60V	4A	FSM4-SKP4	8008138
		Panel feed through M12 - M12	female, straight, M12 4 Pins, A	male, straight, M12 4 Pins, A		250V	4A	FKFS4/M12	8018404
			female, straight, M12 5 Pins, A	male, straight, M12 5 Pins, A		60V	4A	FKFS4.5/M12	8018405
			female, straight, M12 8 Pins, A	male, straight, M12 8 Pins, A		30V	2A	FKFS8/M12	8018410
		Adapter Industrial Ethernet M12 - M12 shielded	female, straight, M12 4 Pins, D	female, straight, M12 4 Pins, D		250V	4A	IE-WAKSY4-IE-WAKSY4	8065952
		Adapter Industrial Ethernet M12 - M12 shielded	female, straight, M12 8 Pins, X	female, straight, M12 8 Pins, X		50V _{AC} 60V _{DC}	0.5A	IE-WAKSX8-IE-WAKSX8	8065951
		Adapter Industrial Ethernet M12 - M12 shielded	female, straight, M12 8 Pins, X	female, straight, M12 4 Pins, D		50V _{AC} 60V _{DC}	0.5A	IE-WAKSX8-IE-WAKSY4	8065950
		Panel feed through Industrial Ethernet M12 - RJ 45 shielded	female, straight, M12 4 Pins, D	female, straight, RJ45 8 Pins		50V _{AC/DC}	0.2A	IE-FKFDSY4-RJ45KS	8069793

			Port						
			E0	E1	E2	U[max]	I[max]	Item description	Item-No.
		Panel feed through Industrial Ethernet M12 - RJ 45 shielded	female, angled, M12 4 Pins, D	female, straight, RJ45 8 Pins		50V _{AC/DC}	0.2A	IE-WFKFDSY4-RJ45KS	8069794
		Panel feed through Industrial Ethernet M12 - RJ 45 shielded	female, straight, M12 8 Pins, X	female, straight, RJ45 8 Pins		50V _{AC} 60V _{DC}	0.5A	IE-FKFDSX8-RJ45KS	8055773
		Panel feed through Industrial Ethernet M12 - RJ 45 shielded	female, angled, M12 8 Pins, X	female, straight, RJ45 8 Pins		50V _{AC} 60V _{DC}	0.5A	IE-WFKFDSX8-RJ45KS	8055774
		Adapter Valve M12	male, angled, Valve A	M12x1, 5 poles A		24V _{AC/DC}	4A	VA22-24.1-WAS5.002	8055767
		Adapter Valve M12	male, angled, Valve A	M12x1, 5 poles A		24V _{AC/DC}	4A	VA22-24.3-WAS5.002	8055768
		Adapter Valve M12	male, angled, Valve A	M12x1, 5 poles A		60V _{AC/DC}	4A	VA22-60.0-WAS5.002	8055770
		Adapter Valve M12	male, angled, Valve A	M12x1, 5 poles A		24V _{DC}	4A	VA41-24.2-WAS5	8055769

Nomenclature

YK-

FK

4

M8-

2

AL-

SW

KP

3

P2-

L/

L/

S370

Cable quality

Cable length exit E2

Cable length exit 1

PNP | Quantity LEDs + circuit

Number of pins

M8 KP: female | SP: male

M12 WAK: female | WAS: male

M8 SW: screw-type, angled | S: screw-type, straight

M12 W: angled | without: straight

Automation Line

2x subsequent type of port (exit E1 + exit E2)

Type exit 0: M8 | M12

Number of pins exit E0

FK: female receptacle | FS: male receptacle

Junction-system with cable-outlet

Overmolded connector at exit E1 + exit E2

Overmolded valve connector at exit E1 + exit E2

2

V

A

22

24.

3

Circuit LED

3: +suppressor diode

4: +Z-diode

U_[max]: 24V_{DC} | 24V_{AC/DC}

Contacts 21: 2+PE

22: 2+PE gebrückt

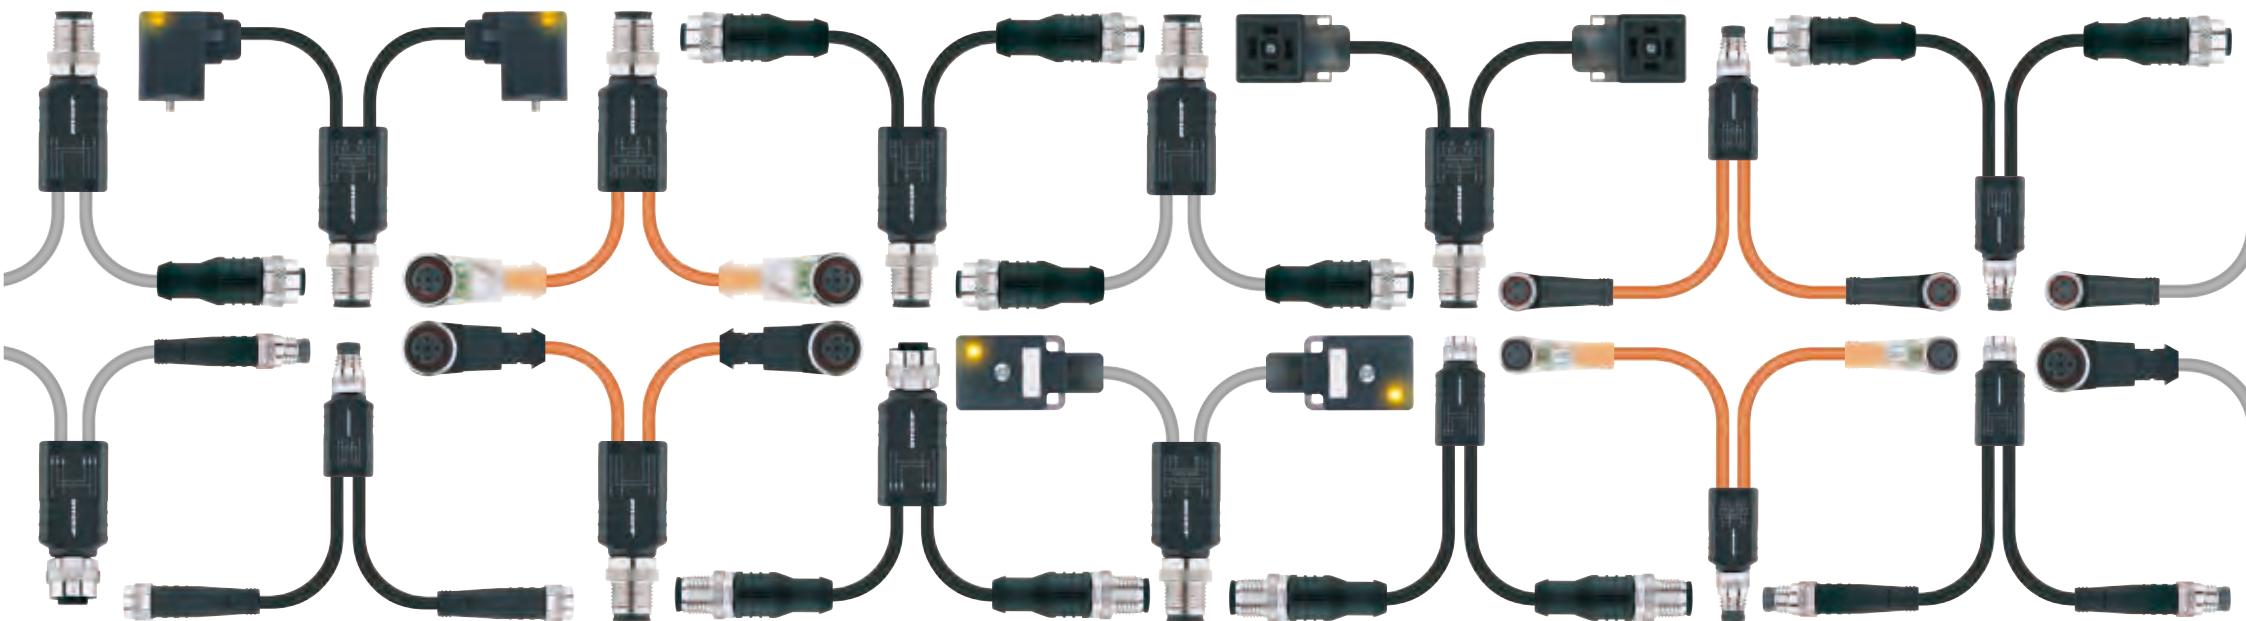
Type: A | B | BI | C | CI

Valve connector

2x subsequent type of port (exit E1 + exit E2)









Cable	Material	UL	Colour	Features	drag chain-adapted	torsion resistant	welding sparks resistant
P00	PVC/PVC		GY				
S370	PUR/PP	✓	BK		✓	✓	✓
S7400	PUR/PP	✓	OG	robotic, for high mechanical stresses	✓	✓	✓

















Y-splitters with cable outlet








Technical data	M12	M8	Valve connectors
Insulation resistance	$\geq 10^8 \Omega$	$\geq 10^8 \Omega$	$\geq 10^8 \Omega$
Ambient temperature product	-30°C...+90°C	-30°C...+90°C	-30°C...+90°C
Contact material	Metal, gold-plated	Metal, gold-plated	Metal, silver-plated
Contact-carrier material	Plastic, TPU	Plastic, TPU	Plastic, PA, BK
Grip body material	Plastic, TPU	Plastic, TPU	Plastic, TPU
Coupling nut material	Metal, nickel-plated	Metal, nickel-plated	
Sealing (female) material	FPM/FKM	FPM/FKM	Plastic, TPU
Standards	IEC 61076-2-101	IEC 61076-2-104	DIN EN 175301-803
Degree of protection (mounted)	IP65, IP67, IP68	IP65, IP67, IP68	IP65, IP67, IP68
Mechanical life-cycle	>100 mating cycles	>100 mating cycles	>100 mating cycles
Degree of pollution	3	3	3








The extremely compact Y-splitters with cable outlet are available in M8 and M12 housing styles. Male and female connector alignment is customer freely selectable. All standard cables in PUR and PVC for cable outlets are available. The cable outlets can be equipped with M8-, M12- or valve connectors upon request. As a result of the various options, a high diversity will facilitate product configuration for nearly any application.





L = cable length													
		E0	E1 + E2	Cable	Item description	0,3m	0,6m	1m	2m	3m	5m	10m	
		female, M12, straight 4 Pins, A	open cable end	PVC	YK-FK4M12-L/L/P00				8075696		8075697	8075698	
				PUR	YK-FK4M12-L/L/S370				8075693		8075694	8075695	
				PUR	YK-FK4M12-L/L/S7400				8075699		8075700	8075701	
		female, M12, straight 4 Pins, A	male, M12, straight 3 Pins, A	PVC	YK-FK4M12-2AL-WAS3-L/L/P00	8075999	8076005	8076011	8076014	8076018	8076021		
				PUR	YK-FK4M12-2AL-WAS3-L/L/S370	8075930	8075937	8075942	8075944	8075946	8075948		
				PUR	YK-FK4M12-2AL-WAS3-L/L/S7400	8076028	8076030	8076034	8076041	8076083	8076087		
		female, M12, straight 4 Pins, A	male, M8, straight 3 Pins, A	PVC	YK-FK4M12-2AL-SSP3-L/L/P00	8075902	8075903	8075904	8075905	8075906	8075907		
				PUR	YK-FK4M12-2AL-SSP3-L/L/S370	8075852	8075890	8075891	8075892	8075893	8075894		
				PUR	YK-FK4M12-2AL-SSP3-L/L/S7400	8075908	8075909	8075910	8075922	8075925	8075927		
		male, M12, straight 4 Pins, A	open cable end	PVC	YK-FS4M12-L/L/P00				8075705		8075706	8075707	
				PUR	YK-FS4M12-L/L/S370				8075702		8075703	8075704	
				PUR	YK-FS4M12-L/L/S7400				8075708		8075709	8075710	
		male, M12, straight 4 Pins, A	female, M12, straight 3 Pins, A	PVC	YK-FS4M12-2AL-WAK3-L/L/P00	8075968	8075969	8075970	8075971	8075973	8075979		
				PUR	YK-FS4M12-2AL-WAK3-L/L/S370	8075943	8075947	8075950	8075951	8075953	8075955		
				PUR	YK-FS4M12-2AL-WAK3-L/L/S7400	8075992	8075993	8075994	8075998	8076002	8076009		
		male, M12, straight 4 Pins, A	female, M12, straight 4 Pins, A	PVC	YK-FS4M12-2AL-WAK4-L/L/P00	8076259	8076261	8076262	8076263	8076265	8076266		
				PUR	YK-FS4M12-2AL-WAK4-L/L/S370	8076222	8076224	8076226	8076227	8076228	8076230		
				PUR	YK-FS4M12-2AL-WAK4-L/L/S7400	8076286	8076288	8076289	8076291	8076292	8076294		
		male, M12, straight 4 Pins, A	female, M12, angled 3 Pins, A	PVC	YK-FS4M12-2AL-WWAK3-L/L/P00	8076082	8076085	8076089	8076092	8076094	8076096		
				PUR	YK-FS4M12-2AL-WWAK3-L/L/S370	8076038	8076045	8076048	8076052	8076055	8076062		
				PUR	YK-FS4M12-2AL-WWAK3-L/L/S7400	8076108	8076109	8076110	8076111	8076112	8076113		

						L = cable length						
		E0	E1 + E2	Cable	Item description	0,3m	0,6m	1m	2m	3m	5m	10m
		male, M12, straight 4 Pins, A	female, M12, angled 4 Pins, A	PVC	YK-FS4M12-2AL-WWAK4-L/L/P00	8076357	8076358	8076359	8076360	8076361	8076362	
				PUR	YK-FS4M12-2AL-WWAK4-L/L/S370	8076333	8076334	8076336	8076338	8076340	8076343	
				PUR	YK-FS4M12-2AL-WWAK4-L/L/S7400	8076367	8076368	8076369	8076370	8076371	8076372	
		male, M12, straight 4 Pins, A	female, M12, angled, with LED 3 Pins, A	PVC	YK-FS4M12-2AL-WWAK3P2-L/L/P00	8076126	8076127	8076129	8076130	8076132	8076134	
				PUR	YK-FS4M12-2AL-WWAK3P2-L/L/S370	8076117	8076119	8076121	8076123	8076124	8076125	
				PUR	YK-FS4M12-2AL-WWAK3P2-L/L/S7400	8076136	8076138	8076139	8076141	8076142	8076143	
		male, M12, straight 4 Pins, A	female, M12, angled, with LED 4 Pins, A	PVC	YK-FS4M12-2AL-WWAK4P2-L/L/P00	8076386	8076387	8076388	8076389	8076390	8076391	
				PUR	YK-FS4M12-2AL-WWAK4P2-L/L/S370	8076374	8076375	8076376	8076377	8076378	8076379	
				PUR	YK-FS4M12-2AL-WWAK4P2-L/L/S7400	8076395	8076396	8076397	8076398	8076399	8076400	
		male, M12, straight 4 Pins, A	female, M8, straight 3 Pins, A	PVC	YK-FS4M12-2AL-SKP3-L/L/P00	8076114	8076115	8076116	8076118	8076120	8076122	
				PUR	YK-FS4M12-2AL-SKP3-L/L/S370	8076101	8076103	8076104	8076105	8076106	8076107	
				PUR	YK-FS4M12-2AL-SKP3-L/L/S7400	8076128	8076131	8076133	8076135	8076137	8076140	
		male, M12, straight 4 Pins, A	female, M8, straight 4 Pins, A	PVC	YK-FS4M12-2AL-SKP4-L/L/P00	8075923	8075924	8075926	8075928	8075932	8075936	
				PUR	YK-FS4M12-2AL-SKP4-L/L/S370	8075914	8075917	8075918	8075919	8075920	8075921	
				PUR	YK-FS4M12-2AL-SKP4-L/L/S7400	8075938	8075939	8075940	8075941	8075945	8075949	
		male, M12, straight 4 Pins, A	female, M8, angled 3 Pins, A	PVC	YK-FS4M12-2AL-SWKP3-L/L/P00	8076150	8076151	8076152	8076153	8076154	8076157	
				PUR	YK-FS4M12-2AL-SWKP3-L/L/S370	8076144	8076145	8076146	8076147	8076148	8076149	
				PUR	YK-FS4M12-2AL-SWKP3-L/L/S7400	8076268	8076270	8076272	8076275	8076280	8076284	
		male, M12, straight 4 Pins, A	female, M8, angled 4 Pins, A	PVC	YK-FS4M12-2AL-SWKP4-L/L/P00	8076012	8076016	8076019	8076022	8076023	8076024	
				PUR	YK-FS4M12-2AL-SWKP4-L/L/S370	8075952	8075954	8075958	8075997	8076003	8076006	
				PUR	YK-FS4M12-2AL-SWKP4-L/L/S7400	8076025	8076026	8076027	8076029	8076032	8076035	

L = cable length											
	E0	E1 + E2	Cable	Item description	0,3m	0,6m	1m	2m	3m	5m	10m
		male, M12, straight 4 Pins, A	female, M8, angled, with LED 3 Pins, A	PVC	YK-FS4M12-2AL-SWKP3P2-L/L/P00	8075859	8076363	8076364	8076365	8076366	8076373
				PUR	YK-FS4M12-2AL-SWKP3P2-L/L/S370	8076320	8076322	8076324	8076327	8076329	8076331
				PUR	YK-FS4M12-2AL-SWKP3P2-L/L/S7400	8076380	8076381	8076382	8076383	8076384	8076385
		male, M12, straight 4 Pins, A	female, M8, angled, with LED 4 Pins, A	PVC	YK-FS4M12-2AL-SWKP4P2-L/L/P00	8076049	8076050	8076057	8076061	8076064	8076067
				PUR	YK-FS4M12-2AL-SWKP4P2-L/L/S370	8076039	8076042	8076043	8076044	8076046	8076047
				PUR	YK-FS4M12-2AL-SWKP4P2-L/L/S7400	8076070	8076071	8076072	8076073	8076076	8076079
		male, M12, straight 4 Pins, A	female, M8, straight 4 Pins, A	PUR	YK-FS4M12-2AL-SKP4.028-L/L/S370	8086653	8086654	8086655	8086582	8086656	8086583
		male, M12, straight 4 Pins, A	female, M8, angled 4 Pins, A	PUR	YK-FS4M12-2AL-SWKP4.028-L/L/S370	8086657	8086658	8086659	8086585	8086660	8086586
		female, M8, straight 4 Pins, A	open cable end	PVC	YK-FK4M8-L/L/P00				8074375	8075666	8075667
				PUR	YK-FK4M8-L/L/S370				8074373	8075664	8075665
				PUR	YK-FK4M8-L/L/S7400				8074376	8075668	8075669
		female, M8, straight 4 Pins, A	male, M8, straight 3 Pins, A	PVC	YK-FK4M8-2AL-SSP3-L/L/P00	8075855	8075929	8075931	8075933	8075934	8075935
				PUR	YK-FK4M8-2AL-SSP3-L/L/S370	8075846	8075911	8075912	8075913	8075915	8075916
				PUR	YK-FK4M8-2AL-SSP3-L/L/S7400	8075961	8075963	8075964	8075965	8075966	8075967
		female, M8, straight 4 Pins, A	male, M12, straight 3 Pins, A	PVC	YK-FK4M8-2AL-WAS3-L/L/P00	8075995	8075996	8076000	8076001	8076004	8076007
				PUR	YK-FK4M8-2AL-WAS3-L/L/S370	8075980	8075981	8075982	8075984	8075986	8075989
				PUR	YK-FK4M8-2AL-WAS3-L/L/S7400	8076059	8076063	8076065	8076066	8076068	8076069

L = cable length											
	E0	E1 + E2	Cable	Item description	0,3m	0,6m	1m	2m	3m	5m	10m
		male, M8, straight 4 Pins, A	female, M12, straight 3 Pins, A	PVC	YK-FS4M8-2AL-WAK3-L/L/P00	8076231	8076232	8076233	8076234	8076236	8076239
				PUR	YK-FS4M8-2AL-WAK3-L/L/S370	8076215	8076219	8076221	8076223	8076225	8076229
				PUR	YK-FS4M8-2AL-WAK3-L/L/S7400	8076243	8076244	8076245	8076246	8076247	8076248
		male, M8, straight 4 Pins, A	female, M12, straight 4 Pins, A	PVC	YK-FS4M8-2AL-WAK4-L/L/P00	8076235	8076237	8076238	8076240	8076241	8076242
				PUR	YK-FS4M8-2AL-WAK4-L/L/S370	8076213	8076214	8076216	8076217	8076218	8076220
				PUR	YK-FS4M8-2AL-WAK4-L/L/S7400	8076250	8076251	8076253	8076255	8076256	8076258
		male, M8, straight 4 Pins, A	female, M12, angled 3 Pins, A	PVC	YK-FS4M8-2AL-WWAK3-L/L/P00	8076267	8076269	8076271	8076273	8076276	8076283
				PUR	YK-FS4M8-2AL-WWAK3-L/L/S370	8076249	8076252	8076254	8076257	8076260	8076264
				PUR	YK-FS4M8-2AL-WWAK3-L/L/S7400	8076285	8076287	8076290	8076293	8076295	8076296
		male, M8, straight 4 Pins, A	female, M12, angled 4 Pins, A	PVC	YK-FS4M8-2AL-WWAK4-L/L/P00	8076297	8076298	8076300	8076301	8076302	8076303
				PUR	YK-FS4M8-2AL-WWAK4-L/L/S370	8076274	8076277	8076278	8076279	8076281	8076282
				PUR	YK-FS4M8-2AL-WWAK4-L/L/S7400	8076309	8076311	8076312	8076315	8076318	8076319
		male, M8, straight 4 Pins, A	female, M12, angled, with LED 3 Pins, A	PVC	YK-FS4M8-2AL-WWAK3P2-L/L/P00	8076310	8076313	8076314	8076316	8076317	8076321
				PUR	YK-FS4M8-2AL-WWAK3P2-L/L/S370	8076299	8076304	8076305	8076306	8076307	8076308
				PUR	YK-FS4M8-2AL-WWAK3P2-L/L/S7400	8076323	8076325	8076326	8076328	8076330	8076332
		male, M8, straight 4 Pins, A	female, M12, angled, with LED 4 Pins, A	PVC	YK-FS4M8-2AL-WWAK4P2-L/L/P00	8076345	8076346	8076347	8076348	8076349	8076350
				PUR	YK-FS4M8-2AL-WWAK4P2-L/L/S370	8076335	8076337	8076339	8076341	8076342	8076344
				PUR	YK-FS4M8-2AL-WWAK4P2-L/L/S7400	8076351	8076352	8076353	8076354	8076355	8076356
		male, M8, straight 4 Pins, A	open cable end	PVC	YK-FS4M8-L/L/P00				8074377	8075672	8075673
				PUR	YK-FS4M8-L/L/S370				8074374	8075670	8075671
				PUR	YK-FS4M8-L/L/S7400				8074378	8075674	8075675

L = cable length											
	E0	E1 + E2	Cable	Item description	0,3m	0,6m	1m	2m	3m	5m	10m
		male, M8, straight 4 Pins, A	female, M8, straight 3 Pins, A	PVC	YK-FS4M8-2AL-SKP3-L/L/P00	8075972	8075974	8075975	8075976	8075977	8075978
				PUR	YK-FS4M8-2AL-SKP3-L/L/S370	8075857	8075956	8075957	8075959	8075960	8075962
				PUR	YK-FS4M8-2AL-SKP3-L/L/S7400	8075983	8075985	8075987	8075988	8075990	8075991
		male, M8, straight 4 Pins, A	female, M8, straight 4 Pins, A	PVC	YK-FS4M8-2AL-SKP4-L/L/P00	8076162	8076163	8076164	8076165	8076166	8076167
				PUR	YK-FS4M8-2AL-SKP4-L/L/S370	8076155	8076156	8076158	8076159	8076160	8076161
				PUR	YK-FS4M8-2AL-SKP4-L/L/S7400	8076168	8075856	8076169	8076170	8076171	8076172
		male, M8, straight 4 Pins, A	female, M8, angled 3 Pins, A	PVC	YK-FS4M8-2AL-SWKP3-L/L/P00	8075858	8076031	8076033	8076036	8076037	8076040
				PUR	YK-FS4M8-2AL-SWKP3-L/L/S370	8076008	8076010	8076013	8076015	8076017	8076020
				PUR	YK-FS4M8-2AL-SWKP3-L/L/S7400	8076051	8076053	8076054	8076056	8076058	8076060
		male, M8, straight 4 Pins, A	female, M8, angled 4 Pins, A	PVC	YK-FS4M8-2AL-SWKP4-L/L/P00	8076392	8076393	8076394	8076401	8076402	8076403
				PUR	YK-FS4M8-2AL-SWKP4-L/L/S370	8076173	8076174	8076175	8076176	8076177	8076178
				PUR	YK-FS4M8-2AL-SWKP4-L/L/S7400	8076404	8076405	8076406	8076407	8076408	8076409
		male, M8, straight 4 Pins, A	female, M8, angled, with LED 3 Pins, A	PVC	YK-FS4M8-2AL-SWKP3P2-L/L/P00	8076084	8076086	8076088	8076090	8076091	8076093
				PUR	YK-FS4M8-2AL-SWKP3P2-L/L/S370	8076074	8076075	8076077	8076078	8076080	8076081
				PUR	YK-FS4M8-2AL-SWKP3P2-L/L/S7400	8076095	8076097	8076098	8076099	8076100	8076102
		male, M8, straight 4 Pins, A	female, M8, angled, with LED 4 Pins, A	PVC	YK-FS4M8-2AL-SWKP4P2-L/L/P00	8076419	8076420	8076421	8076422	8076423	8076424
				PUR	YK-FS4M8-2AL-SWKP4P2-L/L/S370	8076413	8076414	8076415	8076416	8076417	8076418
				PUR	YK-FS4M8-2AL-SWKP4P2-L/L/S7400	8076425	8076426	8076427	8076428	8076429	8076430
		male, M12, straight 5 Pins, A	female, Valve A, angled 2+PE, PE bridged	PVC	YK-FS5M12-2VA22-24.3-L/L/P00	8077612	8077671	8077614	8077615	8077616	8077617
				PUR	YK-FS5M12-2VA22-24.3-L/L/S370	8077604	8077606	8077608	8077609	8077610	8077611

L = cable length												
		E0	E1 + E2	Cable	Item description	0,3m	0,6m	1m	2m	3m	5m	10m
		male, M12, straight 5 Pins, A	female, Valve B, straight 2+PE Pins	PVC	YK-FS5M12-2VB21-24.3-L/L/P00	8077627	8077673	8077631	8077633	8077635	8077637	
				PUR	YK-FS5M12-2VB21-24.3-L/L/S370	8077618	8077672	8077620	8077621	8077623	8077625	
		male, M12, straight 5 Pins, A	female, Valve BI, angled 2+PE Pins	PVC	YK-FS5M12-2VBI21-24.3-L/L/P00	8077603	8077605	8077607	8077622	8077624	8077626	
				PUR	YK-FS5M12-2VBI21-24.3-L/L/S370	8077639	8077674	8077644	8077646	8077648	8077651	
		male, M12, straight 5 Pins, A	female, Valve C, angled 2+PE, PE bridged	PVC	YK-FS5M12-2VC22-24.4-L/L/P00	8077640	8077641	8077643	8077645	8077647	8077649	
				PUR	YK-FS5M12-2VC22-24.4-L/L/S370	8077628	8077630	8077632	8077634	8077636	8077638	
		male, M12, straight 5 Pins, A	female, Valve CI, angled 2+PE, PE bridged	PVC	YK-FS5M12-2VCI22-24.4-L/L/P00	8077658	8077659	8077660	8077661	8077663	8077664	
				PUR	YK-FS5M12-2VCI22-24.4-L/L/S370	8077650	8077652	8077654	8077655	8077656	8077657	